



DENVER HIGH-BAY

- Linear high-bay
- Modular design
- IP66
- IK10




Model No. & Technical Specification

Model No.	Description	Power (W)	Lumens	CCT	CRI	Optic
IDV10050N	Denver modular LED high bay IP66 IK10 non-dimmable	100	15,500	5000	80	60 x 100°
IDV15050N	Denver modular LED high bay IP66 IK10 non-dimmable	150	23,250	5000	80	60 x 100°
IDV20050N	Denver modular LED high bay IP66 IK10 non-dimmable	200	31,000	5000	80	60 x 100°
IDV24050N	Denver modular LED high bay IP66 IK10 non-dimmable	240	37,200	5000	80	60 x 100°
IDV30050N	Denver modular LED high bay IP66 IK10 non-dimmable	300	46,500	5000	80	60 x 100°
IDV40050N	Denver modular LED high bay IP66 IK10 non-dimmable	400	62,000	5000	80	60 x 100°
IDV48050N	Denver modular LED high bay IP66 IK10 non-dimmable	480	72,000	5000	80	60 x 100°

Code methodology: Standard isle optic 60 x 100°

Use alternative optic suffix if required - *example IDV10040N2585

Available Optics

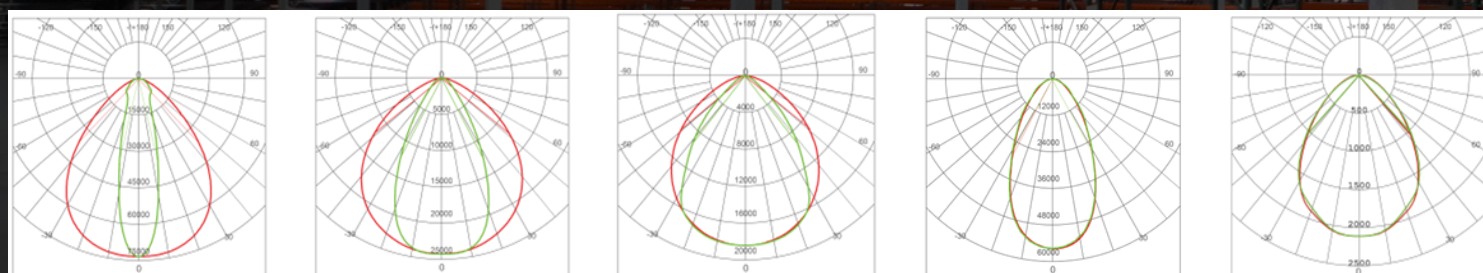

25° x 85°

60° x 100°

80° x 100°

60°

90°

- High efficacy LED technology
- Low glare LED optimised optics
- Designed to suit modern high rack warehouse installations
- Multiple mounting options available

MANUFACTURER ENDORSED WARRANTY

SAL Commercial offers a 5 year warranty on all products. Confidence behind world class manufacturing processes and procedures ensures that only the highest quality product is supplied.

